






290 N 100 W, LOGAN, UTAH 84321  
 PHONE 435.716.9020 FAX 435.716.9001  
[www.loganutah.org](http://www.loganutah.org)

## RESIDENTIAL STAIR SECTIONS

### General Stair Notes:

- State Amendment allows 8" maximum rise, 9" minimum tread, with 3/4" toe (the largest step may not exceed the smallest by more than 3/8").
- Handrail height must be at least 34" and may not exceed 38" above the nosing of treads.
- Handrails must be continuous for the full length of the stairway.
- Handrails projecting from the wall must have at least 1 1/2" between the wall and handrail.
- Handrail ends must be returned or end in a newel post.
- Headroom clearance shall not be less than 6'8" from the tread nosing to the nearest ceiling or soffit.
- Guardrails shall not be less than 36" in height.
- Open guardrails and stair railings shall have balusters placed so that a 4" diameter sphere cannot pass through.
- Call Building Dept for further questions.

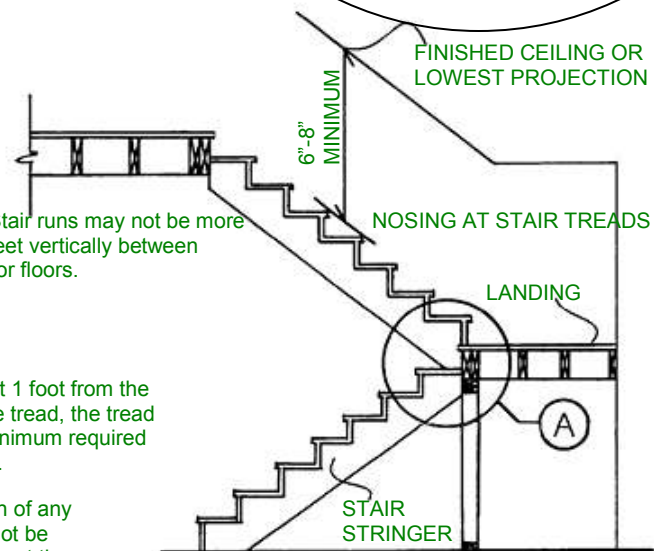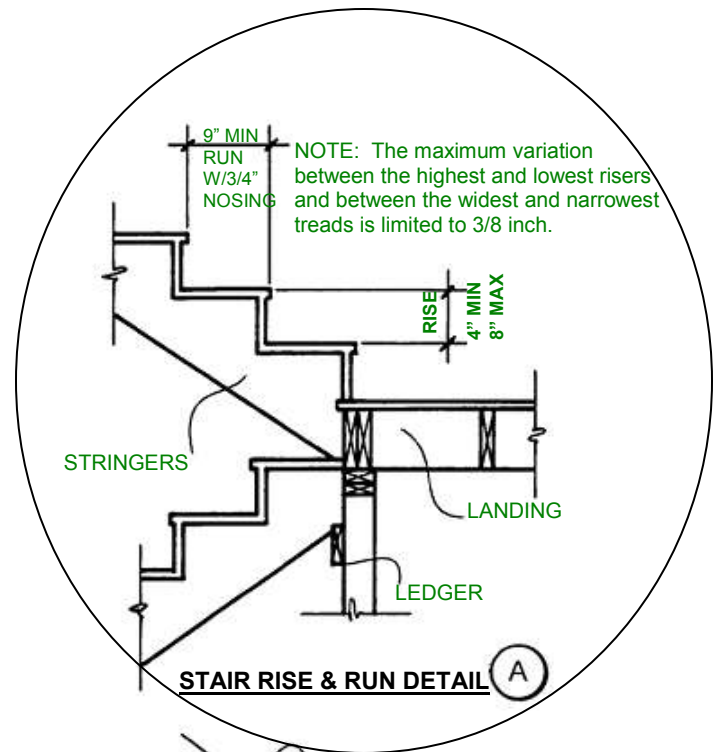

NOTE: Riser openings shall be limited to less than 4 inches when located 30 inches or more above ground or floor.